

BF25 / BF30 HAND PALLET TRUCK

Capacity 2500 KGS / 3000 KGS

Professional and ideal storage aid for all variety of manual transport tasks over short distances in stores and warehouse as well as factory plants

Top class range of pallet truck with excellent designs, reliable, sturdy, torsion-resistant



Sealed oil cylinder

Excellent whole casting hydraulic pump, robust and durable, with fine control of lowering speed and overload valve, low routine maintenance.



Entry roller

Tandem load roller with additional entry roller which guarantees for maximum stability and safety for transporting goods on slopes.




Polyurethane

Ideal for delicate floors with hard wearing and non-marking property, quiet and durable.



Nylon

Low drag efforts, high resistance to chemicals, preferred in food, fishing and chemical industries with smooth floors.




Rubber

Best choice for quiet and durable demands, ideal for smooth and rough floors.



A

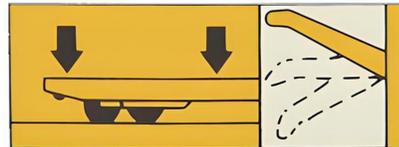

Three position operational handle lever for lifting, transportation and lowering purposes.



B



Ergonomically designed handle with comfortable rubber grip allows the optimized safety as well as comfortable.



● Handle Option

Main Feature



High strength chassis design

The high strength chassis and compact design ensure the long life and flexibility. Specifically supported by its perfect metal welding and bending technology, and metal toughness as well.



Security and stability

The hydraulic lifting system of this vehicle adopts the design without oil pipe, which greatly improves the reliability of the hydraulic system and reduces the risk of oil leakage of the joint or oil pipe.

PRODUCT

Product display



Suitable for long distance transportation inside the warehouse
 Suitable for logistics companies

BF25 / BF30

Technical Specification

Model		BF25	BF30
Pump		BF casting pump	
capacity	kg	2500	3000
Height of fork	mm	75-190 / 85-200	
Fork width	mm	550/685	
Fork Length	mm	800/900/1000/1100/1150/1220	
Steering wheel size	mm	180	
Front wheel size (twin wheels)	mm	Φ 80 × 70 / Φ 74 × 70	
Front wheel dimensions (single wheel)	mm	Φ 80 × 93 / Φ 74 × 93	
Material of the wheel		Nylon / PU	
Pump time to the top	times	≤13	
packing	pcs/pallet	6	
Net Weight	kg	68-75	

